

## Contact Details

Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

# International System of Units (SI units)

## ■ SI units

The International System of Units, or SI, comprises seven base units, prefixes to represent integer powers of 10 in the range from  $10^{18}$  to  $-10^{-18}$ , supplementary units of radians and steradians, and twenty-seven derived units defined according to the resolution by the International Committee of Weights and Measures.

It is often abbreviated as SI from its French expression "Système International d'Unités".

Its use in ISO standards started in 1971. In Japan, the Conference on Standardization of the Japanese Industrial Standards Committee decided in 1972 to introduce the SI units to JIS in a stepwise manner. And in 1974, JIS Z 8203 International System of Units (SI) (established based on ISO1000) and the guide for its use were enacted and promulgated, and their dissemination is in progress.

**Appendix table 1 SI base units**

Quantity	Name	Symbol	Quantity	Name	Symbol
length	meter	m	thermodynamic temperature	kelvin	K
mass	kilogram	kg	luminous intensity	candela	cd
time	second	s	amount of substance	mole	mol
current	ampere	A			

**Appendix table 2 SI supplementary units**

Quantity	Name	Symbol
Plane related angle	radian	rad
solid angle	steradian	sr


**Appendix table 3 SI derived units with special names**

Quantity	Name	Symbol	Definition
frequency	hertz	Hz	$s^{-1}$
force	newton	N	$m \cdot kg \cdot s^{-2}$
pressure, stress	pascal	Pa	$N/m^2$
energy, work, heat	joule	J	$N \cdot m$
power, radiant flux	watt	W	$J/s$
quantity of electricity, electric charge	coulomb	C	$A \cdot s$
voltage, electrical potential	volt	V	$W/A$
electrical capacitance	farad	F	$C/V$
electrical resistance	ohm	$\Omega$	$V/A$
conductance	siemens	S	$A/V$
magnetic flux	weber	Wb	$V \cdot s$
magnetic flux density	tesla	T	$Wb/m^2$
inductance	henry	H	$Wb/A$
celsius' temperature scale	degree Celsius	$^{\circ}C$	$t^{\circ}C = (t + 273.15) K$
luminous flux	lumen	lm	$cd \cdot sr$
illuminance	lux	lx	1
radioactivity	becquerel	Bq	
absorbed dose	gray	Gy	

**Appendix table 7.1 Conversion table from conventional gravitation units to SI units**

Quantity	Unit name	Symbol	Conversion factor for SI units	SI unit name	Symbol
angle	degree minute second	$^{\circ}$ $'$ $"$	$\pi/180$ $\pi/10800$ $\pi/648000$	radian	rad
length	meter micron angstrom	m $\mu m$ $\text{\AA}$	$10^{-6}$ $10^{-10}$	meter	m
area	square meter are	$m^2$ a	$10^2$	square meter	$m^2$
volume	cubic meter liter	$m^3$ L	$10^{-3}$	cubic meter	$m^3$

## ■ Structure of SI and JIS Z 8203

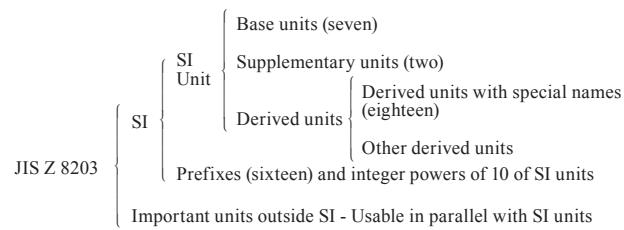

**Appendix table 4 Example of SI derived units that are expressed with special names**

Quantity	Name	Symbol
viscosity	pascal second	Pa·s
moment of force	newton meter	N·m
surface tension	newton per meter	N/m
heat flux density, irradiation	watt per square meter	W/m <sup>2</sup>
heat capacity, entropy	joule per kelvin	J/K
specific heat capacity, specific entropy *	joule per kilogram kelvin	J/(kg·K)
thermal conductivity	watt per meter kelvin	W/(m·K)
permittivity	farad per meter	F/m
permeability	henry per meter	H/m

\* It is also referred to as mass entropy.

**Table 5 SI prefixes**

Multiplication	Prefix	Symbol	Multiplication	Prefix	Symbol
$10^{18}$	exa	E	$10^{-1}$	deci	d
$10^{15}$	petra	P	$10^{-2}$	centi	c
$10^{12}$	tera	T	$10^{-3}$	milli	m
$10^9$	giga	G	$10^{-6}$	micro	$\mu$
$10^6$	mega	M	$10^{-9}$	nano	n
$10^3$	kilo	k	$10^{-12}$	pico	p
$10^2$	hecto	h	$10^{-15}$	femto	f
$10^1$	deca	da	$10^{-18}$	atto	a

Multiplications of  $10^6$  (M: mega) and larger are expressed with capital letters.

**Appendix table 6 Units used in parallel with SI units**

Name	Symbol	Value in SI units
minute	min	1 min = 60 s
hour	h	1 h = 60 min = 3,600 s
day	d	1 d = 24 h = 86,400 s
degree	$^{\circ}$	$1^{\circ} = (\pi/180) \text{ rad}$
minute	'	$1' = (1/60)^{\circ} = (\pi/10,800) \text{ rad}$
second	"	$1'' = (1/60)' = (\pi/648,000) \text{ rad}$
liter	L	$1 L = 1 dm^3 = 10^{-3} m^3$
ton	t	$1 t = 10^3 kg$

**Contact Details**

Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

## International System of Units (SI units)

**Appendix table 7.2 Conversion table from conventional gravitation units to SI units**

Quantity	Unit name	Symbol	Conversion factor	SI unit name	Symbol
angle	degree minute second	° ' "	$\pi/180$ $\pi/10800$ $\pi/648000$	radian	rad
length	meter micron angstrom	m $\mu$ $\text{\AA}$	1 $10^{-6}$ $10^{-10}$	meter	m
area	square meter are	$\text{m}^2$ a	1 $10^2$	square meter	$\text{m}^2$
volume	cubic meter liter	$\text{m}^3$ l, L	1 $10^{-3}$	cubic meter	$\text{m}^3$
mass	kilogram ton atomic mass unit	kg t u	1 $10^3$ $1.6606 \times 10^{-27}$	kilogram	kg
time	second minute hour day	s min h d	1 60 3600 86400	second	s
speed, velocity	meter per second	m/s	1	meter per second	m/s
frequency	cycle	$\text{s}^{-1}$	1	hertz	Hz
rotational speed	times per minute	$\text{min}^{-1}$	1/60	revolutions per second	$\text{s}^{-1}$
angular velocity	radian per second	rad/s	1	radian per second	rad/s
acceleration	meter per second squared g	$\text{m/s}^2$ G	1 9.8067	meter per second squared	$\text{m/s}^2$
force	weight kilogram weight ton dyne	kgf tf dyn	9.8067 9806.7 $10^{-5}$	newton	N
moment of force	weight kilogram meter	kgf·m	9.8067	newton meter	N·m
stress	weight kilogram per square meter weight kilogram per square centimeter weight kilogram per square millimeter	$\text{kgf/m}^2$ $\text{kgf/cm}^2$ $\text{kgf/mm}^2$	9.8067 $9.8067 \times 10^4$ $9.8067 \times 10^6$	pascal	Pa
pressure	weight kilogram per square meter meter of water millimeter mercury column bar	$\text{kgf/m}^2$ $\text{mH}_2\text{O}$ $\text{mmHg}$ bar	9.8067 9806.7 101325/760 $10^5$	pascal	Pa
energy	erg International Steam Table calorie weight kilogram meter kilowatt hour metric horse power hour	erg $\text{cal}_{\text{IT}}$ kgf·m kW·h PS·h	$10^{-7}$ 4.1868 9.8067 $3.600 \times 10^6$ $2.6478 \times 10^6$	joule	J
work rate and power	watt metric horse power kilocalorie per hour	W PS kcal/h	1 735.5 1.163	watt	W
viscosity and viscosity coefficient	poise centipoise weight kilogram second per square meter	P cP kgf·s/m <sup>2</sup>	$10^{-1}$ $10^{-3}$ 9.8067	pascal second	Pa·s
dynamic viscosity and dynamic viscosity coefficient	stokes centistokes	St $\text{mm}^2/\text{S}$ , cSt	$10^{-4}$ $10^{-6}$	square meter per second	$\text{m}^2/\text{s}$
temperature	degree	$^{\circ}\text{C}$	+273.15	kelvin	K
magnetic flux	maxwell	$\text{M}_x$	$10^{-8}$	weber	Wb
magnetic flux density	gamma gauss	$\gamma$ $\text{G}_s$	$10^{-9}$ $10^{-4}$	tesla	T
magnetic field strength	oersted	$\text{O}_e$	$10^3/4\pi$	ampere per meter	A/m
quantity of electricity	coulomb	C	1	coulomb	C
electrical potential difference	volt	V	1	volt	V
electrical capacitance	farad	F	1	farad	F
electrical resistance	ohm	$\Omega$	1	ohm	$\Omega$
conductance	siemens	S	1	siemens	S
inductance	henry	H	1	henry	H
current	ampere	A	1	ampere	A

**Contact Details**

Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

**Appendix table 8 Comparison table between SI and CGS/system of gravitational units**

Representative quantity	SI units	Absolute system of units		Gravity unit system	
		m - kg	ft - lb	m - kgf	ft - lbf
length	m	m	ft	m	ft
mass	kg	kg	lb	kgf·s <sup>2</sup> /m	lbf·s <sup>2</sup> /ft
time	s	s	s	s	s
gravity (force)	N	kg·m/s <sup>2</sup>	lb·ft/s <sup>2</sup>	kgf	lbf
acceleration	m/s <sup>2</sup>	m/s <sup>2</sup>	ft/s <sup>2</sup>	kgf/s <sup>2</sup>	lbf/s <sup>2</sup>
pressure (stress)	Pa	kg/m·s <sup>2</sup>	lb/ft·s <sup>2</sup>	kgf/m <sup>2</sup>	lbf/ft <sup>2</sup>
energy	J	kg·m <sup>2</sup> /s <sup>2</sup>	lb·ft <sup>2</sup> /s <sup>2</sup>	kgf·m	lbf·ft
work rate	W	kg·m <sup>2</sup> /s <sup>3</sup>	lb·ft <sup>2</sup> /s <sup>3</sup>	kgf·m/s	lbf·ft/s
density	kg/m <sup>3</sup>	kg/m <sup>3</sup>	lb/ft <sup>3</sup>	kgf·s <sup>2</sup> /m <sup>4</sup>	lbf·s <sup>2</sup> /ft <sup>4</sup>
viscosity	Pa·s	kg/m·s	lb/ft·s	kgf·s/m <sup>2</sup>	lbf·s/ft <sup>2</sup>
temperature	K	°C	°C	°C	°C

Note: 1 N =  $10^5$  g·cm/s<sup>2</sup>, 1 Pa = IN/m<sup>2</sup>, 1 J = 1 N·m, 1 W = 1 N·m/s

1 dyn = 1 g·cm/s<sup>2</sup>, 1 Poundal = 1 lb·ft/s<sup>2</sup>, 1 slug = 1 lb·s<sup>2</sup>/ft

1 Poise = 1 g/cm·s

## Contact Details

Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

# International System of Units (SI units)

## ■ Conversion tables for frequently used units to SI units

### ● Force

N newton	dyn	kgf
1	$1 \times 10^5$	$1.019\ 72 \times 10^{-1}$
$1 \times 10^{-5}$	1	$1.019\ 72 \times 10^{-6}$
9.806 65	$9.806\ 65 \times 10^5$	1

### ● Moment of force

N·m newton meter	kgf·m
1	0.102 0
9.807	1

Note: 1 N·m = 1 kg·m<sup>2</sup>/s<sup>2</sup>

### ● Pressure

Pa	bar	kgf/cm <sup>2</sup>	atm	mmH <sub>2</sub> O	mmHg or Torr
1	$1 \times 10^{-5}$	$1.019\ 72 \times 10^{-5}$	$9.869\ 23 \times 10^{-6}$	$1.019\ 72 \times 10^{-1}$	$7.500\ 62 \times 10^{-3}$
$1 \times 10^5$	1	1.019 72	$9.869\ 23 \times 10^{-1}$	$1.019\ 72 \times 10^4$	$7.500\ 62 \times 10^2$
9.806 65 × 10 <sup>4</sup>	$9.806\ 65 \times 10^{-1}$	1	$9.678\ 41 \times 10^{-1}$	$1 \times 10^4$	$7.355\ 59 \times 10^2$
$1.013\ 25 \times 10^5$	1.013 25	1.033 23	1	$1.033\ 23 \times 10^4$	$7.600\ 00 \times 10^2$
9.806 65	$9.806\ 65 \times 10^{-5}$	$1 \times 10^{-4}$	$9.678\ 41 \times 10^{-5}$	1	$7.355\ 59 \times 10^{-2}$
$1.333\ 22 \times 10^2$	$1.333\ 22 \times 10^{-3}$	$1.359\ 51 \times 10^{-3}$	$1.315\ 79 \times 10^{-3}$	$1.359\ 51 \times 10$	1

Note: 1 Pa = 1 N/m<sup>2</sup>

### ● Stress

Pa	MPa or N/mm <sup>2</sup>	kgf/mm <sup>2</sup>	kgf/cm <sup>2</sup>
1	$1 \times 10^{-6}$	$1.019\ 72 \times 10^{-7}$	$1.019\ 72 \times 10^{-5}$
$1 \times 10^6$	1	$1.019\ 72 \times 10^{-1}$	$1.019\ 72 \times 10$
9.806 65 × 10 <sup>6</sup>	9.806 65	1	$1 \times 10^2$
$9.806\ 65 \times 10^4$	$9.806\ 65 \times 10^{-2}$	$1 \times 10^{-2}$	1

### ● Work, Energy, Heat

J	kW·h	kgf·m	kcal
1	$2.777\ 78 \times 10^{-7}$	$1.019\ 72 \times 10^{-1}$	$2.388\ 89 \times 10^{-4}$
$3.600 \times 10^6$	1	$3.670\ 98 \times 10^5$	$8.600\ 0 \times 10^2$
9.806 65	$2.724\ 07 \times 10^{-6}$	1	$2.342\ 70 \times 10^{-3}$
$4.186\ 05 \times 10^3$	$1.162\ 79 \times 10^{-3}$	$4.268\ 58 \times 10^2$	1

Note: 1 J = 1 W·s, 1 W·h = 3 600 W·s

1 cal = 4.186 05 J

### ● Power

kW	kgf·m/s	PS	kcal/h
1	$1.019\ 72 \times 10^2$	1.359 62	$8.600\ 0 \times 10^2$
$9.806\ 65 \times 10^{-3}$	1	$1.333\ 33 \times 10^{-2}$	8.433 71
$7.355 \times 10^{-1}$	$7.5 \times 10$	1	$6.325\ 29 \times 10^2$
$1.162\ 79 \times 10^{-3}$	$1.185\ 72 \times 10^{-1}$	$1.580\ 95 \times 10^{-3}$	1

Note: 1 W = 1 J/s, PS: metric horsepower

1 PS = 0.735 5 kW

1 cal = 4.186 05 J

### ● Temperature

$$T_1 = T_2 + 273.15$$

$$T_3 = 1.8T_2 + 32$$

$$\begin{cases} T_1: \text{thermodynamic temperature K (kelvin)} \\ T_2: \text{Celsius' temperature scale } ^\circ\text{C (degree Celsius)} \\ T_3: ^\circ\text{F} \end{cases}$$

### ● Viscosity

Pa·s pascal second	cP	P (poise)
1	$1 \times 10^3$	$1 \times 10$
$1 \times 10^{-3}$	1	$1 \times 10^{-2}$
$1 \times 10^{-1}$	$1 \times 10^2$	1

Note: 1 P = 1 dyn·s/cm<sup>2</sup> = 1 g/cm·s  
1 Pa·s = 1 N·s/m<sup>2</sup>, 1 cP = 1 mPa·s

### ● Dynamic viscosity

m <sup>2</sup> /s	mm <sup>2</sup> /s	St
1	$1 \times 10^6$	$1 \times 10^4$
$1 \times 10^{-6}$	1	$1 \times 10^{-2}$
$1 \times 10^{-4}$	$1 \times 10^2$	1

Note: 1 St = 1 cm<sup>2</sup>/s

### ● Thermal conductivity

W/(m·K)	kcal/(h·m·°C)
1	$8.600\ 0 \times 10^{-1}$
1.162 79	1

Note: 1 cal = 4.186 05 J

### ● Heat transfer coefficient

W/(m <sup>2</sup> ·K)	kcal/(h·m <sup>2</sup> ·°C)
1	$8.600\ 0 \times 10^{-1}$
1.162 79	1

Note: 1 cal = 4.186 05 J

### ● Specific heat capacity

J/(kg·K)	kcal/(kg·°C) cal/(g·°C)
1	$2.388\ 89 \times 10^{-4}$
4.186 05 × 10 <sup>3</sup>	1

Note: 1 cal = 4.186 05 J